




INDOOR & OUTDOOR
Radiant Patio Heaters
 SGLMG SERIES



Introducing SunStar GLASS™ Marine Grade Series For Coastal Environments. Wind & Rain Resistant.

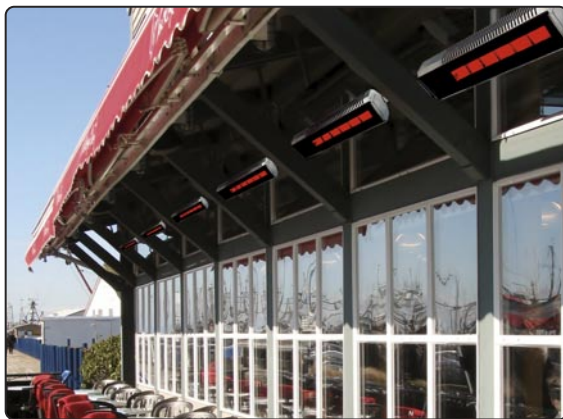

- **Designed for harsh environments.**
- **316 Stainless Steel.**
- Outdoor rated.
- Can be mounted from horizontal position to 60°
- Two-stage (high/low) models.
- Available for natural gas and LPG.
- Chain suspension or wall mounted.
- Aesthetically designed with glass front to blend with nearly any decor.
- 3 year limited warranty on burner assembly and 1 year limited warranty on controls.

QUICK SPECS

Designed for Outdoor Hospitality applications in coastal or other highly corrosive environments.

HEATING CAPACITY
 24,000 To 35,000 BTU

MODELS
 Single Or 2-Stage Operation

MOUNTING
 Chain Suspension
 Or Wall/Ceiling Brackets
 (HORIZONTAL OR UP TO 60°)

FUEL
 Natural Gas Or Propane

ELECTRICAL
 120VAC, 60Hz

IGNITION
 Direct Spark

When tied directly into the gas line, the time and cost of replacing propane bottles can be eliminated.

The new GLASS™ Marine Grade radiant patio heater is SunStar's newest line of heaters designed for restaurants and other hospitality service industries.

Radiant infrared heating is easy to install and energy efficient. The SunStar GLASS Marine Grade radiant patio heater is ideal for outdoor or partially covered dining areas, bars, patios, verandas, smoking areas, vestibules and other outdoor covered areas.

Like the radiant warmth from the sun, radiant heat warms people and objects directly at floor level without first heating the surrounding air. Customers can dine and relax under the radiant warmth of the (GLASS Marine Grade), and help you to maximize the use of your seating areas during those colder winter months.



An optional Heat Shield can be installed to reduce the clearances above the heater

Ask your SunStar distributor about all the great features and benefits of SunStar's new GLASS™ Marine Grade radiant patio heater and how it can help to maximize your profits.

ACCESSORIES

Single Switch Controller



Remote Control



2 Stage Operation



SunStar GLASS Marine Grade can be controlled individually or in zones by a simple three position switch or a thermostat. It allows the owner to operate the heater at low fire on mild days and switch to full power on cold days.

Gas Connection



Mounting Option



Optional Mounting Bracket

Adjustable mounting bracket allows the heater to be installed directly to the wall or ceiling at different angles.

Technical Specifications

MODEL**	GAS TYPE	INPUT BTU/Hr		TYPICAL MOUNTING HEIGHT*		SPACING BETWEEN HEATERS		BURNER PRESSURE	SUPPLY PRESSURE		SHIPPING WEIGHT
		HIGH	LOW	HORIZ	ANGLE	HORIZ	ANGLE		MINIMUM	MAXIMUM	
SGL35 -N7-MG	Natural	35,000	24,000	8 – 11 ft.	7 – 9 ft.	8 – 16 ft.	6 – 14 ft.	6.0" w.c.	7.0" w.c.	14" w.c.	55 lbs.
SGL35 -L7-MG	Propane							11.0" w.c.	11.5" w.c.		
SGL35 -N10-MG*	Natural	6.0" w.c.	7.0" w.c.								
SGL35 -L10-MG*	Propane	11.0" w.c.	11.5" w.c.								



Electrical: 120 VAC/60 Hz Electrical Supply – Direct Spark Ignition system - 0.1 Amp draw

*The suggested mounting heights and spacing are subject to site conditions. Heaters can be operated in excessive weather conditions. Excessive weather and high winds (15+ mph) can reduce the effectiveness of the heaters.

**Can be operated as a single stage heater with factory supplied jumper wire.

*N10 and L10 models indicate with remote.

Dimensions


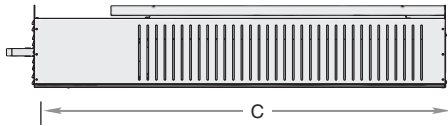



A	B	C
9½"	11½"	48"

Minimum Clearance To Combustibles – Outdoor Installations**

HORIZONTAL MOUNT

ANGLE MOUNT

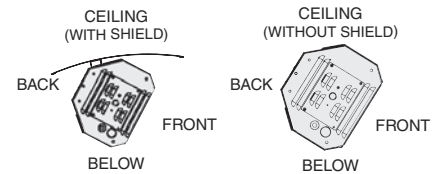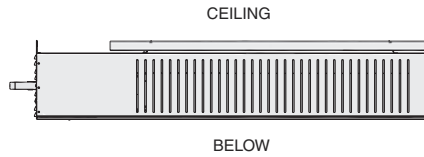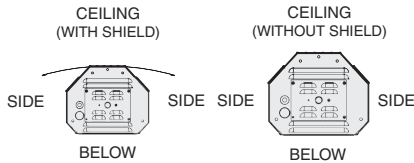

MOUNTING ANGLE	CEILING	CEILING* WITH SHIELD	BACK	BACK* WITH SHIELD	SIDE	END	BELOW	FRONT
0°	20"	10"	–	–	24"	12"	40"	48"
30°	23"	14"	12"	12"				
60°	24"	17"						

*Installed with optional clearance shield to reduce ceiling and back clearances.

**Heaters can be installed indoors. Indoor installations require higher clearances. Refer to I & Os for Indoor Clearances to Combustibles requirements.

COMBUSTION AIR AND VENTILATION

Combustion air and venting requirements for all gas-fired heating equipment must be provided per the National Fuel Gas Code NFPA54 and CAN B149 or the authority having jurisdiction over the installation. Refer to Installation and Operation Instructions for further information. In indoor and tightly sealed buildings this heater requires ventilation. An indirect vented installation requires a minimum ventilation flow of 4 CFM per 1000 Btu/hr of total installed heater capacity by either gravity or power ventilation. For indirect vented applications, building exhaust opening must be located above the level of the heaters and the inlet air openings must be located below the level of the heaters.

FOR YOUR SAFETY

OPERATE SUNSTAR GAS INFRARED HEATERS WITH PROPER CARE AND OBSERVE ALL SAFETY PRECAUTIONS. Installation and service must be performed by a licensed contractor. The installation must conform to manufacturer's installation and operating instructions and with local codes. In the absence of local codes, the installation must conform with the National Fuel Gas Code ANSI Z223.1 (also known as NFPA 54) or CAN B149 installation codes.



PO Box 36271 Charlotte, North Carolina 28236
Telephone (888) 778-6782 (704) 372-3486 Fax (704) 332-5843

Email: info@sunstarheaters.com www.sunstarheaters.com

SunStar Heating Products, Inc. strives to improve quality and performance on a continuing basis and reserves the right to change specifications and material without notice.

©Copyright 2022, SunStar Heating Products, Inc.

DISTRIBUTED BY

